

# DeFelsko<sup>®</sup> DOLLY14

## Single-use dollies for adhesion testing


- The **DeFelsko<sup>®</sup> DOLLY14** is for use with the **PosiTest AT Series**.
  - Ideal for measuring higher bond strength finishes such as coatings on metal(s)
  - Maximize capability and measurement resolution across a wide range of bond strengths
  - Self-aligning dollies
- 
- Size: 14mm Ø
  - Material: Aluminium
  - Maximum Pull-Off Pressure (AT-A): 7,000psi / 50MPa
- 
- Quantity: One Pack with 10 pieces



### Application example:

#### Self-Alignment Feature

The PosiTest Adhesion Tester compensates for misalignment. The self-aligning, quick-coupling actuator and spherical articulating dolly head enable uniform distribution of the pulling force over the surface being tested, preventing a one-sided pull-off.

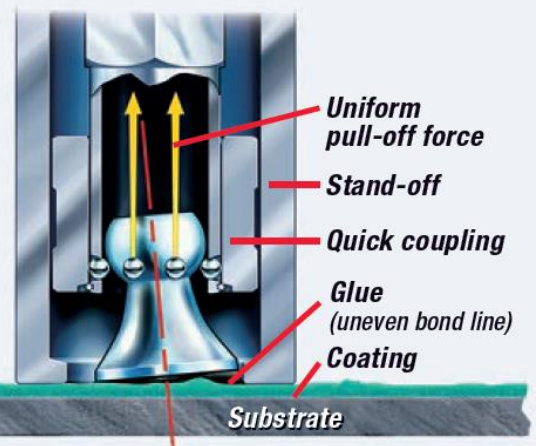

### Ordering information:

Typ: **DOLLY14**  
Art.-no: **8330DFATDOLLY14**

### Authorized Distributor:



TVW Meßtechnik GmbH  
Sommelweg 31  
32257 Bünde  
Fon: 05223 / 9277 - 0  
Fax: 05223 / 9277 - 40  
info@twwuende.de  
www.twwuende.de

### Manufacturer:

**DeFelsko Corporation / USA**