



Fiber Optic Visual Fault Locator 10mW For 2.5 + 1.25 ferrules

Art no.: WZ0049

Technical Features

Visual identification and localization of defects in glass fibers

2.5 mm ferrule + 1.25 mm adapter for LC, SC, ST, FC, LSH, DIN


Range up to 10 km, operating time up to 40 hours

Robust aluminum housing, 175x30x30 mm, black

Wavelength and power: 650 ±20 nm, 10 mW (max 18 mW)

Power supply: 2 AA batteries, not included

Technical Drawings

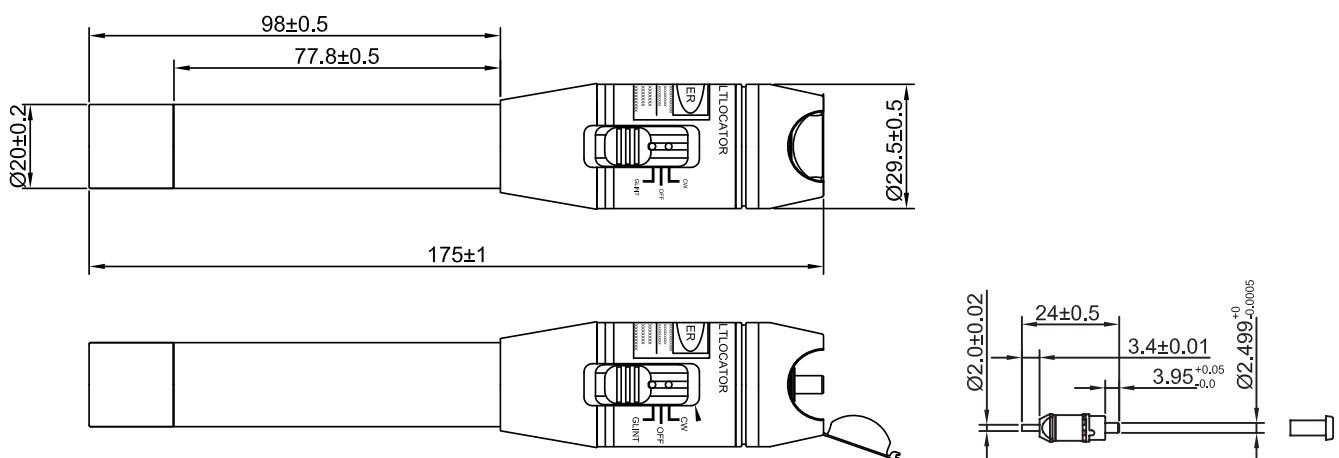

WZ0049



4 052792 049077

Made in China

www.logilink.de



RoHS
 compliant



* The specifications and pictures are subject to change without notice.
 *All trade names referenced are the registered trademark of their respective owners.

Package Contents

Fiber Optic Visual Fault Locator 10mW x1

Carrying Bag x1

User Manual x1

Autorisierter Distributor

TVW Meßtechnik GmbH

Semmelweg 31

32257 Bünde

Fon: 05223 / 9277 - 0

Fax: 05223 / 9277 - 40

info@twwbuende.de

www.twwbuende.de



WZ0049



4 052792 049077

Made in China

www.logilink.de



RoHS
compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered trademark of their respective owners.